HD 10/15-4 CAGE FOOD

The HD 10/15-4 Cage Food high-pressure cleaner with 150 bar working pressure. All parts coming into contact with water are food safe. This makes it suitable for commercial use in the food industry.



WORLD'S NO. 1 PRESSURE WASHER BRAND

Made in Germany

2-3 h

SERVO CONTROL

EASY!Force

Order no.	1.353-908.0

- 2 cleaning agent tanks with rinse function
- High-pressure hose in food-industry qualitiy, grey non-marking wheels

Technical data		
EAN code		4054278157924
Number of current phases	**Ph**	3
Voltage	**V**	400
Frequency	**Hz**	50
Flow Rate	**l/h**	440 - 990
Water feed temperature	**°C**	max. 85
Operating pressure	**bar / MPa**	20 - 145 / 2 - 14.5
Max. Pressure	**bar / MPa**	175 / 17.5
Power rating	**kW**	6.4
Colour		anthracite
Weight (with accessories)	**kg**	78.4
Weight incl. packaging	**kg**	86.8
Dimensions (L × W × H)	**mm**	650 × 521 × 1100

Scope of supply

Spray gun: EASY!Force Food

High-pressure hose length: 10 m

High-pressure hose type: Food industry version

High-pressure hose specification: DN 8,400 bar

Stainless steel spray lance: 1050 mm

Power nozzle

Servo Control

Equipment

Detergent function: 5 l

Pressure cut-off

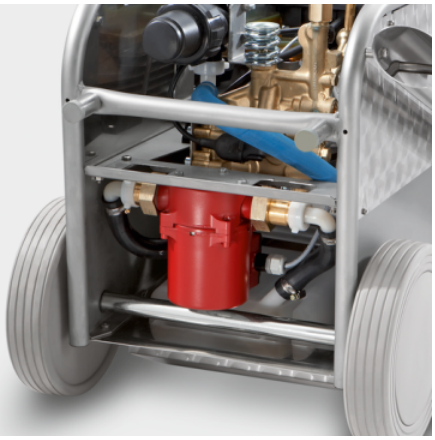
Closed tubular frame construction with integrated bracket for crane loading





Complies with the most rigorous hygiene requirements

- Non-corrosive stainless steel.
- All parts in contact with water are made from special food-grade brass.



Particularly effective cleaning

- Booster pump for feed temperature of up to 85°C.
- Approved for RM 734 chlorinated cleaning agent.



Hygiene requirements

- Non-marking and easy to manoeuvre.
- Food-grade, non-marking high-pressure hose.

HD 10/15-4 Cage Food, 1.353-908.0, 2026-10-02

KÄRCHER

EQUIPMENT FOR HD 10/15-4 CAGE FOOD
1.353-908.0


1


2


3


4


5


6


7


8


9


10


11


12


13


14

		Order no.	Description	
TRIGGER GUNS				
Trigger guns				
EASY!Force Food	1	4.118-015.0	Perfect for the food industry: the EASY!Force high-pressure gun with full ceramic valve enables fatigueless working due to virtually zero holding force for the operator.	■
EASY!Force conversion kit 1 – from high-pressure hose	2	4.111-050.0	For retrofitting Kärcher high-pressure cleaners with existing high-pressure hose: EASY!Force conversion kit 1 with EASY!Force high-pressure gun, spray lance and all adapters through to the nozzle.	☐
EASY!Force conversion kit 2 – from machine	3	4.111-051.0	Developed for retrofitting existing high-pressure cleaners from Kärcher: EASY!Force conversion kit 2 with EASY!Force high-pressure gun, spray lance, high-pressure hose and necessary adapters.	☐
EASY!Force conversion kit 3 – high-pressure gun	4	4.111-052.0	Compatible with existing high-pressure hose and spray lance: EASY!Force conversion kit 3, incl. EASY!Force trigger gun and all necessary adapters for upgrading your high-pressure cleaner.	☐
Servo Control				
Servo Control, food, 750 l/h – 1100 l/h	5	4.118-016.0	Water flow and pressure control on the trigger gun. Food-grade, parts in contact with water are stainless steel.	■
SPRAY LANCES				
Rotating spray lances				
Spray lance, 1050 mm, rotatable	6	4.112-000.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	■
Jet pipe with transport packaging, 840 mm	7	4.119-003.0	Rotating Classic spray lance with handle bowls in a stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Jet pipe TR 1050mm with package, 1050 mm	8	4.119-008.0	High-pressure spray lance with EASY!Lock screw connections from the Classic series from Kärcher. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Jet pipe TR 600mm with package, 600 mm	9	4.119-009.0	Rotating Classic spray lance with handle bowls in a stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Jet pipe Classic TR 100mm, 100 mm	10	4.119-013.0		☐
Jet pipe Classic TR 200mm, 200 mm	11	4.119-014.0		☐
Jet pipe Classic TR 400mm, 400 mm	12	4.119-015.0		☐
LED nozzle light	13	2.680-002.0	Bright, lightweight LED work light for direct mounting on spray lance of EASY!Force high-pressure gun. Better view in unfavourable lighting conditions for up to 5 working hours.	☐
Spray lance, 250 mm, rotatable	14	4.112-027.0	Spray lance, 250 mm, rotatable, ergonomic	☐

■ Included in delivery. ☐ Available accessories.

KÄRCHER


EQUIPMENT FOR HD 10/15-4 CAGE FOOD
1.353-908.0



15


16


17


18


19


20


21


22


23


24


25


26


27


28–29

		Order no.	Description	
SPRAY LANCES				
Rotating spray lances				
Spray lance, 400 mm, rotatable	15	4.112-024.0	Spray lance, 400 mm, rotatable, ergonomic	☐
Spray lance, 600 mm, rotatable	16	4.112-007.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 840 mm, rotatable	17	4.112-006.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1550 mm, rotatable	18	4.112-018.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 2050 mm, rotatable	19	4.112-021.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance extender, 1000 mm	20	4.112-048.0	Spray lance extension with EASY!Lock connection. Length 1000 mm.	☐
Double lance				
Double lance, 960 mm	21	2.112-016.0	960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning).	☐
Angular spray lance				
WC and gutter lance	22	4.112-029.0	Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	☐
Flexible spray lance				
Flexible lance, 1050 mm	23	4.112-035.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	☐
High pressure articulated joint	24	4.112-057.0	For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer.	☐
Gutter cleaner				
Gutter cleaning lance	25	2.112-015.0	The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	☐
Undercarriage spray lance				
Underbody lance	26	4.112-032.0	Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	☐
Additional handle				
Additional handle for EASY!Lock spray lances	27	4.321-380.0	Comfortable in every situation – the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task.	☐
KÄRCHER POWER NOZZLE				
Power nozzle spray angle 25°				
Power nozzle , 062	28	2.113-012.0	The highly concentrated, particularly high-yield and therefore extremely economical PressurePro Smoke Resin Remover RM 33 represents the strongest combination of cleaning surfactants and complexing agents that Kärcher has to offer. Specially designed to meet the stringent demands of the food industry and bakeries, this powerful deep cleaner removes typical food soiling from practically all alkali-resistant surfaces, machines, appliances and utensils. Smoke resin, proteins, fats and oils, soot and burnt-in sugar glazes are completely removed. Rack trolleys, baking trays and ovens, smoking systems, grilling and roasting stands, smoking chambers, convection ovens, cold storage rooms – the list of possible applications is almost endless. PressurePro Smoke Resin Remover RM 33 is free of fragrances and dyes and can be rinsed off without leaving any residue.	■

☐ Available accessories.

KÄRCHER

EQUIPMENT FOR HD 10/15-4 CAGE FOOD
1.353-908.0


28–29


30


31


32


33


34


35


36


37


38


39


40–42

		Order no.	Description	
KÄRCHER POWER NOZZLE				
Power nozzle spray angle 15°				
Power nozzle 15°, 070	29	2.113-049.0	Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	☐
HIGH-PRESSURE HOSES				
Longlife food industry version with unions on both sides				
High-pressure hose food grade Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock	30	6.110-053.0	With blue, non-marking and animal fat-resistant outer covering: High-pressure hose (ID 8), 10 m long, with ANTI!Twist and EASY!Lock hand screw connection at both ends.	■
High-pressure hose food grade Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	31	6.110-054.0	High-pressure hose with double steel reinforcement and blue, non-marking and animal fat-resistant outer covering. 20 m long with EASY!Lock hand screw connections.	☐
Longlife 400 with unions on both sides				
High-pressure hose Longlife, 1,5 m, ID 8, 400 bar, 2 × EASY!Lock	32	6.110-024.0	1.5 m high-pressure hose (DN 8) with EASY!Lock manual screw fitting on both sides. Designed for max. 400 bar pressure.	☐
High-pressure hose Longlife, 1,5 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5	33	6.110-069.0	1.5 m long high-pressure hose (DN 8) suitable for up to 400 bar pressure with double steel core. Connections: M 22 × 1.5, as well as the comfortable and quick EASY!Lock manual screw fitting.	☐
Food industry version with unions on both sides				
High-pressure hose food grade, 10 m, ID 8, 250 bar, 2 × EASY!Lock	34	6.110-051.0	High-pressure hose (ID 6), 10 m long, with grey, non-marking outer covering. Approved for use in the food industry. With EASY!Lock hand screw connection at both ends.	☐
High-pressure hose food grade, 20 m, ID 8, 250 bar, 2 × EASY!Lock	35	6.110-052.0	Suitable for use in food industry: 20 m long high-pressure hose (ID 8) with grey, non-marking outer covering, ANTI!Twist and EASY!Lock hand screw connections.	☐
ROTARY NOZZLES (DIRT BLASTERS)				
Dirt blaster, large				
Dirt blaster, large, 070/080	36	4.114-030.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	☐
Classic rotary nozzle				
Rotor nozzle TR 080	37	4.119-026.0	The powerful rotating point jet of the Classic rotary nozzle from Kärcher ensures the best possible cleaning results and is suitable for water temperatures of up to 60 °C.	☐
STEAM NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE				
Rollover nozzle holder				
Ball Nozzle Holder	38	4.764-012.0	Rollover nozzle holder for contactless changeover from pencil jet to fan jet as well as low-pressure detergent injection via knurled nut. Without nozzle insert. (Additional type-specific power nozzle).	☐
NOZZLE UNION / SPACER				
Nozzle union				
Nozzle screws	39	4.112-011.0	Nozzle screws with protectors for high-pressure and power nozzles	☐
PIPE CLEANING				
Pipe cleaning hose, ID 6				
Hose assembly TR pipe cleaning DN6 max.2	40	6.110-046.0	The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, DN 6, 20 m, 220 bar	41	6.110-008.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Hose assembly TR pipe cleaning DN6 max.2	42	6.110-047.0	The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐

■ Included in delivery. ☐ Available accessories.

KÄRCHER

EQUIPMENT FOR HD 10/15-4 CAGE FOOD
1.353-908.0


43



44


45


46


47



49, 57


50


51


52


53


54


55


56

		Order no.	Description	
PIPE CLEANING				
Pipe cleaning nozzle				
Pipe cleaning nozzle	43	5.763-019.0	16 mm pipe cleaning nozzle with internal thread. Various jet directions for cleaning blocked drains and pipes.	☐
Rotating pipe cleaning nozzle	44	6.415-440.0	Rotating pipe cleaning nozzle with internal thread and four rotating jets for cleaning blocked drains and pipes.	☐
FLOOR AND HARD SURFACE CLEANER				
Hard surface cleaner FR Classic				
FR TR 40 Classic	45	4.119-029.0	The classic surface cleaner with 400 mm diameter and nozzle kit supplied (2 × size 020; others can be ordered separately).	☐
FR TR 30 Classic	46	4.119-030.0	The classic surface cleaner with 300 mm diameter and nozzle kit supplied (2 × size 018; others can be ordered separately).	☐
Hard Surface Cleaner FRV 30				
FRV 30 Surface Cleaner	47	2.111-010.0	Integrated automatic suction removes dirty water through the supplied 5 m suction hose, eliminating the need to rinse the surface after cleaning and allowing use in inside and outside areas. Features include non-marking steering rollers and double ceramic bearings. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 1000 l/h / 60 °C.	☐
Add-on kit rubber lip	48	2.642-910.0	For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes.	☐
Extension hose 5 m	49	4.440-939.0	5m extension hose for FRV 30. Connection sleeve included.	☐
Add-on kit hose attachment	50	2.642-528.0	Suction cup for fixing the suction hose to smooth surfaces.	☐
Add-on kit dirt trap	51	2.642-532.0	Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas.	☐
Hard surface cleaner FR 30 ME				
FR 30 ME surface cleaner	52	2.111-013.0	Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	☐
Hard Surface Cleaner FR 50				
FR 50 surface cleaner	53	2.111-023.0	Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas.With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	☐
Machine-specific nozzle kit for FR				
Nozzle kit for FR, 850 l/h – 1100 l/h	54	2.640-442.0	Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (850 to 1100 l/h).	☐
Machine-specific nozzle kits for FRV				
Nozzle kit for FRV, 080	55	2.642-982.0	Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30.	☐
Hard surface cleaner FRV 30 Me				
FRV 30 Me Surface Cleaner	56	2.111-012.0	The stainless steel FRV 30 Me Surface Cleaner is designed for hot water cleaning up to 85 °C in inside and outside areas. Integrated automatic suction removes dirty water directly during operation.	☐

☐ Available accessories.

KÄRCHER

EQUIPMENT FOR HD 10/15-4 CAGE FOOD
1.353-908.0


49, 57


58


59


60


61


62


64


65


66


67


68


69


70

		Order no.	Description	
FLOOR AND HARD SURFACE CLEANER				
Hard surface cleaner FRV 30 Me				
Extension hose FRV 30 Me and FRV 50 Me	57	4.441-040.0	5 m extension hose for FRV 30 Me. Includes connecting adapter.	☐
Surface Cleaner FR 50 Me				
FRV 50 Me surface cleaner	58	2.111-024.0	Surface cleaning with automatic suction of the dirty water for very large surfaces. Hot water cleaning up to 85°C.	☐
FOAM SYSTEMS				
Cup foam lance				
Cup foam lance Advanced 3, 900 l/h – 2500 l/h	59	4.112-065.0	Specially designed for use with aggressive cleaning agents: High-quality cup foam lance Advanced 3 with spray angle adjustment and Ecobrass for high-pressure cleaners from Kärcher.	☐
Cup foam lance DUO Advanced 3, 900 l/h – 2500 l/h	60	4.112-069.0	DUO Advanced 3 cup foam lance, designed for use with aggressive detergents. With instant switching to high-pressure cleaning, spraying angle adjustment and two-litre tank.	☐
Cup foam lance Basic 3, 900 l/h – 2500 l/h	61	4.112-055.0	Basic 3 cup foam lance for high-pressure cleaners with a flow rate of 900–2500 l/h: Reduces cleaning agent consumption by 50% compared to cup foam lances without a dosing facility.	☐
1-litre cleaning agent container for cup foam lance basic	62	5.071-414.0	For the quick change of the cleaning agent: Additional 1 litre cleaning agent container for basic foam lance (2.112-053.0, 2.112-054.0 and 2.112-055.0).	☐
1-litre cleaning agent container for cup foam lance	63	6.414-954.0	Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 6.394-668)	☐
1-litre cleaning agent container for cup foam lance advanced	64	6.414-050.0	Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).	☐
Inno Foam Set				
Inno foam kit	65	2.112-008.0	High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	☐
Easy Foam Set				
Easy foam set	66	2.112-011.0	HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	☐
Nozzle kits for Inno/Easy Foam Set				
Nozzle kit 090 Inno/Easy kit 700 – 1000 l/h	67	2.111-019.0	Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.	☐
Foam nozzle mounting kit				
Foam nozzle kit	68	2.112-013.0	Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	☐
MIXERS AND INJECTORS				
HP detergent injector				
Detergent injector for high and low pressure (without nozzles)	69	4.637-032.0	Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	☐
Detergent injector for high pressure	70	4.637-033.0	Cleaning agent dosage at high pressure 3 – 5 %	☐

☐ Available accessories.

KÄRCHER

EQUIPMENT FOR HD 10/15-4 CAGE FOOD
1.353-908.0


71


72–73


74


75


77


78


80


81


82


83


84

		Order no.	Description	
MIXERS AND INJECTORS				
Machine-specific nozzle kit with order no. 3.637-170				
Nozzle insert trapezoidal thread HDS-GER	71	4.769-011.0	For HD/HDS 750 – 1000 l/h. Consists of nozzle insert + HP power nozzle + union	☐
Nozzle insert with order no. 3.637-001				
Nozzle insert for Order No. 3.637-001, high-pressure for machines up to 1100 l/h.	72	4.769-003.0	Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	☐
Low pressure for units rated up to 1100 l/h	73	4.769-001.0	For low pressure with machines up to 1.100 l/h	☐
QUICK CONNECT				
Quick-fitting pipe union coupler trapezo	74	2.115-000.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	☐
Quick-fitting pipe union plug nipple tra	75	2.115-001.0	Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 × 1.5 external thread.	☐
DRUM AND TANK CLEANING				
Add-on kit mud sucker	76	2.641-798.0	For connection to the high-pressure hose of Kärcher high-pressure cleaners: Powerful sludge suction cleaner for the retrofitting of high-pressure cleaners to dirt pumps.	☐
OTHER HP ACCESSORIES				
Add-on kit coin acceptor	77	2.644-029.0	Coin remote control with electronic coin acceptor for connecting a high-pressure cleaner as a pre-wash device. Please have the power outlet and cable provided on site.	☐
Jet gun	78	2.869-067.0	Spray lance with immediate shut-off and infinitely variable pressure and water volume control.	☐
SEALS FOR TRAPEZOIDAL THREAD				
Spare part set seals TR	79	2.880-001.0		☐
COUPLING PARTS				
Rotary coupling				
Rotary coupling	80	4.111-021.0	Reliably prevents twisting of HP hoses. Connection Easy!Lock. Handle protection	☐
Connector				
Nozzle connector/screw connector	81	4.111-022.0	For attaching high-pressure nozzles and accessory parts to the HD trigger gun (with nozzle screws) – 1 × M 22 × 1.5/1 × M 18 × 1.5.	☐
Y distributor	82	4.111-024.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	☐
Short spray unit	83	4.111-038.0	For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). Not compatible with triple nozzles.	☐
Adapter EASY!Lock				
Adapter 1 M22AG-TR22AG	84	4.111-029.0	Adapter 1 to connect the old hose with the new hose	☐

☐ Available accessories.

KÄRCHER

EQUIPMENT FOR HD 10/15-4 CAGE FOOD
1.353-908.0


85


86


87


88


89



90


91


92


93


94


95


96


97


98


		Order no.	Description	
COUPLING PARTS				
Adapter EASY!Lock				
Adapter 2 M22IG-TR22AG	85	4.111-030.0	Adapter 2 to connect the old device with the new hose and the old gun with the new hose	☐
Adapter 3 M22IG-TR22AG	86	4.111-031.0	Adapter 3 to connect the old gun with the new spray lance and new servo regulator	☐
Adapter M22 – Swivel	87	4.111-032.0	Adapter 4 to connect the new gun with the old swivel hose	☐
Adapter 5 TR22IG-M22AG	88	4.111-033.0	Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	☐
Adapter 6 TR22IG-M22AG	89	4.111-034.0	Adapter 6 to connect the new device with the old hose and the old hose with the new gun	☐
Adapter 7 M18IG-TR20AG	90	4.111-035.0	Adapter 7 to connect the old spray lance with the new nozzle	☐
Adapter 8 TR20IG-M18AG	91	4.111-036.0	Adapter 8 to connect the new spray lance with the old nozzle	☐
Coupler -2xTR22 – EASY!Lock	92	4.111-037.0	Adapter 9 to connect the new hose with the new hose	☐
ADAPTER for replacement TR22IG-M22AG Er	93	4.111-046.0	Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection	☐
HOSE REELS				
Automatic, self-winding hose reels				
Automatic plastic hose reel incl. high-pressure hose, 15 m	94	2.639-257.0	Spring-mounted and ready-to-use automatic hose reel for wall mounting. Simplifies handling of the high-pressure hose, shortens set-up times and increases occupational safety.	☐
Automatic hose reel, powder-coated steel / plastic, 20 m	95	6.392-074.0	Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	☐
Automatic stainless steel / synthetic material hose drum, 20 m	96	6.392-083.0	Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	☐
Automatic hose reel, coated, 20 m	97	6.392-106.0	Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	☐
Hose reel, automatic, basalt grey-coated, 20 m	98	6.392-105.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses.	☐

☐ Available accessories.

KÄRCHER

EQUIPMENT FOR HD 10/15-4 CAGE FOOD
1.353-908.0


100


101–102


103


104


105


106


107


108


109


110


111


112–113

		Order no.	Description	
HOSE REELS				
Automatic, self-winding hose reels				
Automatic hose reel, stainless steel, includes swivel holder, 20 m	99	6.392-076.0	Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	☐
Automatic stainless steel hose reel, 40 m	100	6.392-442.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	☐
Powder-coated swivel holder	101	2.639-931.0	Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	☐
Stainless steel swivel holder	102	2.641-867.0	Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	☐
FACADE AND SOLAR PANEL CLEANING				
Brushes				
Drive for roller brush 500	103	4.762-584.0	Hydraulic drive for rotating roller brushes. For cleaning façades or solar power installations with our professional high-pressure cleaners. Installation on spray lance or telescopic lance.	☐
Splash guard for roller brush 500	104	4.762-621.0	Splash guard with velcro fastening for rotating roller brush. Clear view of the brush thanks to transparent film, with protection against splashes at the same time.	☐
Roller brush 500 soft	105	4.762-623.0	Soft brush attachment for use with hydraulic drive (4.762-584.0). Ideal for glass and solar power installation cleaning. Easy quick-change system and secure mounting on drive.	☐
Roller brush 500 medium	106	4.762-624.0	Medium-hard brush attachment for use with hydraulic drive (4.762-584.0). Suitable for sensitive façades, foils and fabrics. Easy and safe quick-change system.	☐
Roller brush 500 hard	107	4.762-625.0	Hard brush attachment for use with hydraulic drive (4.762-584.0). For rough façades, stone and wooden patios. Safe and easy quick-change system.	☐
Brush hard	108	6.960-133.0	Brush with hard bristles for cleaning industry facades and floor coverings and removing coarse dirt. Simple installation on telescopic lances or high-pressure lances from Kärcher.	☐
Brush medium	109	6.960-134.0	Optimally cleans facades, roller shutters and textile fabrics: the brush with medium-hard bristles for fast and simple attachment to telescopic lances or high-pressure lances from Kärcher.	☐
Brush soft	110	6.960-135.0	For simple installation on telescopic lances or high-pressure lances from Kärcher: brush with soft bristles for deep cleaning of sensitive surfaces such as glass or solar systems.	☐
Telescopic				
TL low pressure adapter	111	4.580-097.0	TL low-pressure adapter comprising ball valve for tool-free installation on telescopic lances. Ideal for applications with rotating high-pressure brushes.	☐
Telescopic lance TL 7 F	112	4.762-609.0	Telescopic lance TL 7 F with 7 m reach made from lightweight glass fibre. With quick-release fasteners for retraction and extension.	☐

☐ Available accessories.

KÄRCHER

EQUIPMENT FOR HD 10/15-4 CAGE FOOD
1.353-908.0


112–113


114–115


116


117


118–119


120


121


122


123


124


125


126

		Order no.	Description	
FACADE AND SOLAR PANEL CLEANING				
Telescopic				
Telescopic lance TL 7 H	113	4.762-610.0	Multifunctional hybrid telescopic lance TL 7 H made of rigid and lightweight carbon-glass fibre mix. Telescopic thanks to quick-release fastenings. Up to 7 m reach.	☐
Telescopic lance TL 10 H	114	4.762-611.0	Up to 10 m reach: hybrid telescopic lance TL 10 H. Comprising carbon-glass fibre mix and suitable for multifunctional use. Simple retraction and extension thanks to quick-release fasteners.	☐
Telescopic lance TL 10 C	115	4.762-612.0	Carbon fibre telescopic lance TL 10 C. With up to 10 m reach and practical quick-release fasteners. Multifunctional use for cleaning facades, windows or solar panels.	☐
Telescopic lance TL 14 C	116	4.762-613.0	Maximum rigidity with minimum weight: telescopic lance TL 14 C made from carbon fibre. Enormous reach of 14 m, multifunctional use and easy to use thanks to quick-release fasteners.	☐
TL high pressure adapter	117	4.775-154.0	TL high-pressure adapter, flexible high-pressure gun for high-pressure cleaning with telescopic lances. Ergonomic, easy to install, suitable for right- and left-handed individuals.	☐
WET BLASTING ATTACHMENT				
Wet blasting attachment (without nozzle)				
Wet blasting attachment with flow control (without nozzles)	118	4.115-000.0	Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	☐
Wet blasting attachment without flow control (nozzles not included)	119	4.115-006.0	Addition of spray agent to the high pressure jet. For paint stripping, rust removal and descaling. Assembly on spray lance instead of high-pressure nozzle. Without water flow regulation	☐
Nozzle pack for wet blasting attachment				
Nozzle pack TR wet jet set 0065	120	2.112-026.0	Consisting of wet jet nozzle and nozzle insert – only for use in combination with wet jet unit 4.115-000.0 | 4.115-006.0.	☐
Boron carbide nozzle				
Boron carbide nozzle, for machines as of 1000 l/h	121	6.415-084.0	In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	☐
WATER CONNECTION				
Geka coupling				
With hose nozzle, R 3/4"	122	6.388-455.0	with hose liner	☐
Hose coupling	123	6.388-458.0	with female thread	☐
Suction filter				
Water filter	124	6.414-956.0	Suitable for ponds, storage tanks or similar, polyamide filter casing, stainless steel strainer, 800 µm mesh, R 3/4" and R 1" connection, without non-return valve	☐
Suction filter with check valve	125	4.730-012.0	Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	☐
WASHING BRUSHES				
Push-on washing brush				
Push-on wash brush, M 18 × 1.5	126	4.113-001.0	For universal use for surface cleaning. Mounted using clamp directly at the spray lance. TR thread connection	☐

☐ Available accessories.

EQUIPMENT FOR HD 10/15-4 CAGE FOOD
1.353-908.0


127


128


129

		Order no.	Description	
WASHING BRUSHES				
Rotating washing brush				
Rotating wash brush for > 800 l/h machines, nylon bristles	127	4.113-002.0	Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 × 1.5 (replaceable brush insert).	☐
Rotating wash brush for > 800 l/h machines, natural bristles	128	4.113-005.0		☐
DRUM AND TANK CLEANING				
Barrel and tank cleaning				
Rotary cleaner head M63E	129	6.751-061.0	Compact interior cleaning head made of stainless steel for cleaning the interiors of drums and containers with openings of 65 mm or more. Offers an impressively low weight and constant rotation speed by means of an electric motor.	☐

☐ Available accessories.